


TELV

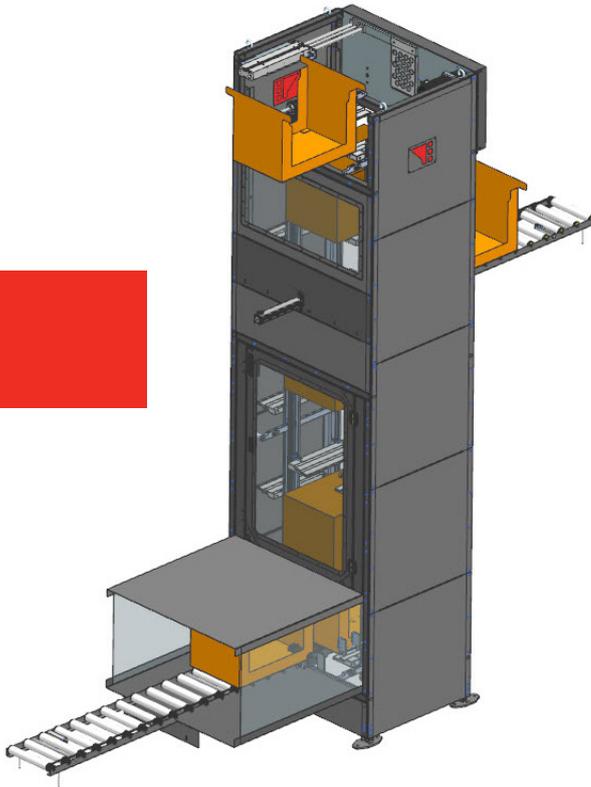

- Low cost tray and case elevator to connect interlevel conveyor system.
- Capacity up to 10 cases pr minute with 10 kg pr RSC or tray.
- Transports tray and RSC up to W525 x L600 x H450
- Footprint <1 sqm. W1132 mm x L813 mm H3975 mm
- Optional infeed and outfeed from front, rear or both.
- Flexible heights for discharges to accomodate customer's needs.
- Available as standalone equipment or integrated to Tronrud's equipment.

TRAY AND CASE ELEVATOR


www.tronrud.no

OPTIONS

TELV s – Elevator with single discharge. This option is integrated in a system with other packaging equipment from Tronrud Engineering. Available with C-flow or Z-flow.

TELV d – Elevator with double discharge. Can be retrofitted as an add on to TELV s or delivered assembled. C-, Z- or E-flow possible.

TELV m – a standalone elevator equipped with electrical cabinet and control panel, aimed for manual packaging line. TELV m is delivered with single discharge and single infeed. Double discharge and additional infeed tunnel can be retrofitted.

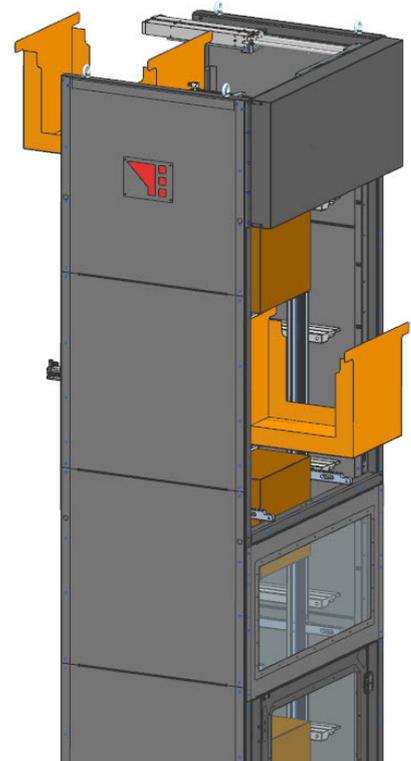

CONTACT:

Tronrud Engineering Packaging Technology

+47 32 16 18 20

packaging@tronrud.no